

SINGLE and MULTI-POINT AMBIENT OZONE ANALYZER




IN USA's model IN-2000 measures ambient ozone levels to monitor ozone leaks in the workplace environment. Above certain concentration levels, ozone is a toxic and corrosive gas. Therefore, the need to monitor worker exposure to ozone to meet OSHA Requirements (see attached table). The model IN-2000 is typically used in areas around ozone generators, gas chambers, gas delivery systems, and semiconductor tools. In addition, it is also used to monitor ozone levels in vent gas, post-destruct or pre-destruct units with a sample conditioning system.

- Microprocessor controlled
- UV absorption technique
- Measures up to 5 sample points
- Built-in field programmable sequencer
- Dedicated 4-20 mA output per channel
- Isolated Analog Outputs
- Dual alarms per channel
- Highly stable Optical System

Specifications

IN-2000 Analyzer

Specifications subject to change without notice

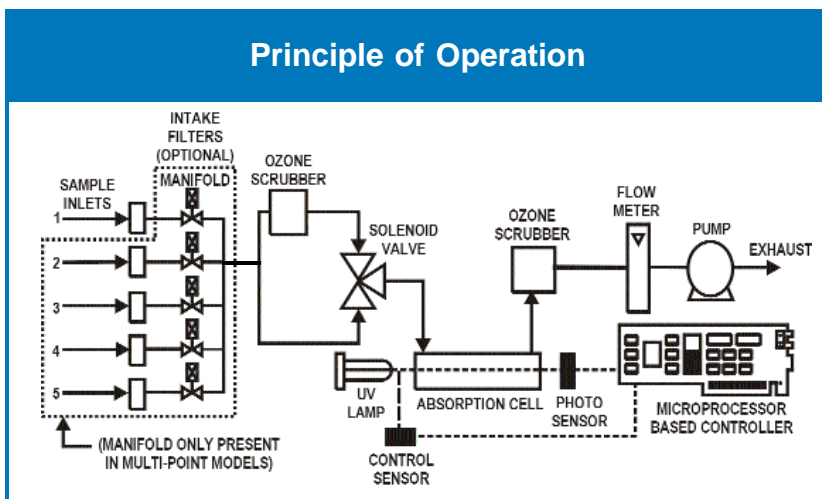

Measuring Principle:	Absolute determination using UV absorption
Number of Sample Points:	1, 3 or 5. Multichannel units have a built-in manifold and programmable sequencer
Measuring Ranges:	0-1 ppm, 0-10 ppm, 1-100 ppm and, 0-1000 ppm
Display Units:	ppm standard
Precision:	0.005 ppm (range 0.001-1.000) 0.01 ppm (range 0.01-10.00) 0.1 ppm (range 0.1-100.0) 1 ppm (range 0-1000)
Linearity:	Better than 99% throughout range
Resolution:	0.001 ppm (range 0-1 ppm) 0.01 ppm (range 0-10 ppm)
Zero Drift:	Less than 0.005 ppm per month
Calibration:	Against UV photometer traceable to the U.S. NIST
Compliance:	CE

Diagnostic Features:	Continuous internal diagnostics with error messages & instrument error relay
Readout:	1 line by 20 character alphanumeric vacuum fluorescent display
Analog Outputs:	Isolated 4-20 mA per channel - Optional
Digital Outputs:	RS-232 interface - Optional RS-422 interface - Optional
Standard Alarms:	Two field programmable alarms with form C relay contacts (5A 250 VAC resistive) per channel - Optional
Supply Voltage:	100-240 VAC 50/60 Hz
Sample Flow Rate:	1.0 to 2.0 l/min nominal. Built-in sampling pump and throttling valve
Connections:	1/4" compression fittings
Configurations:	NEMA 4X / IP65 Wall Mount, 19" Rack or Bench Mount

U.S. OSHA Requirements

TLV-TWA Threshold Limit Value-Time Weighted Average	0.1 ppm _v	The maximum continuous ozone concentration to which an individual can be exposed during a normal 8 hour day / 40 hour work week without adverse effects.
TLV-STEL Threshold Limit Value-Short-Term Exposure Limit	0.3 ppm _v	The maximum intermittent ozone concentration to which an individual can be exposed (provided that TLV-TWA is not exceeded) for no longer than 15 minutes and no more than 4 times per day (with at least 1 hour between exposures.)



IN USA, INC. - 87 CRESCENT ROAD - NEEDHAM, MA 02494 USA - TOLL FREE: (1)-800-798-4029 TEL: (1)-781-444-2929 - FAX (1)-781-444-9229

www.inusacorp.com E-mail: info@inusacorp.com

© 2001 IN USA, INC. - ALL RIGHTS RESERVED - COMPANY CONFIDENTIAL DO NOT REPRODUCE